


CONNECTION OF 2 DYNAMOS 230 VAC

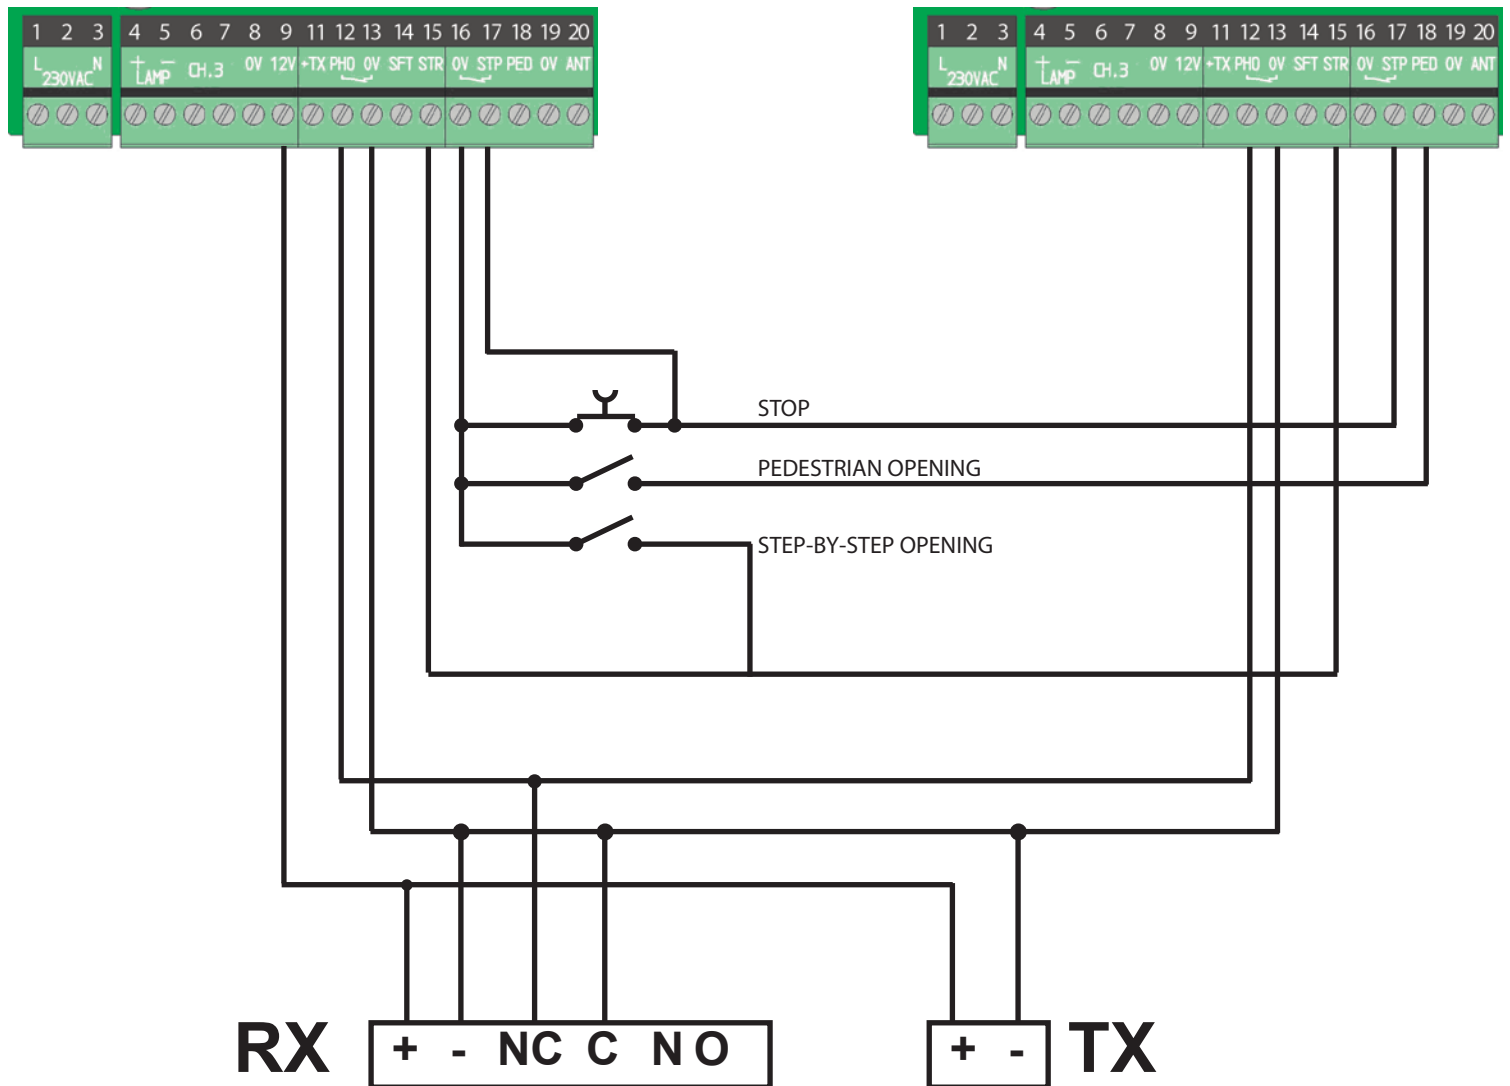

This configuration is necessary to link the commands by cable and the photocells. It is necessary an external receiver to unify the commands by radio (otherwise with a classic programming procedure, one central could receive the signal before than the other one, and cause a wrong functioning).